

SORTING GRAPPLE

MG
100

PRODUCT DATASHEET

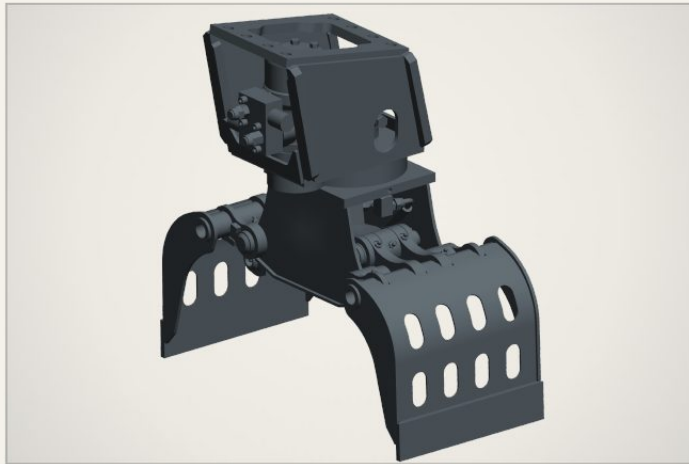


FIG. 01 · MG-100 · EXTERIOR VIEW · RAL 7026

Mini · 1–2 t carriers: a compact, lightweight sorting grapple with low oil-flow demand for skid-steers and mini excavators.

01

Compact and lightweight

Low-profile body optimized for the smallest carrier machines.

02

Precise handling

Well suited to confined spaces and indoor sorting work.

03

Low oil-flow demand

Recommended oil flow: 20 L/min for easy matching with compact carriers.

Technical specifications

PRODUCT DATA

Carrier weight	1–2 t	Closing force	7 kN
Weight	95 kg	Open/close pressure	220 bar
W Shell width	350 mm	Open/close oil flow	20 L/min
A Maximum opening	770 mm	Cylinders	1
Shell volume	40 L	Rotation motors	1
D Closed height	740 mm		

CONNECTION OPTIONS

- DIRECT PIN-ON
- CW
- MS
- SQ / OPEN-S

SHELL OPTIONS

Alternative shell configurations available on request.



OPTION 1 · Grid



OPTION 2 · Closed



OPTION 3 · Toothed

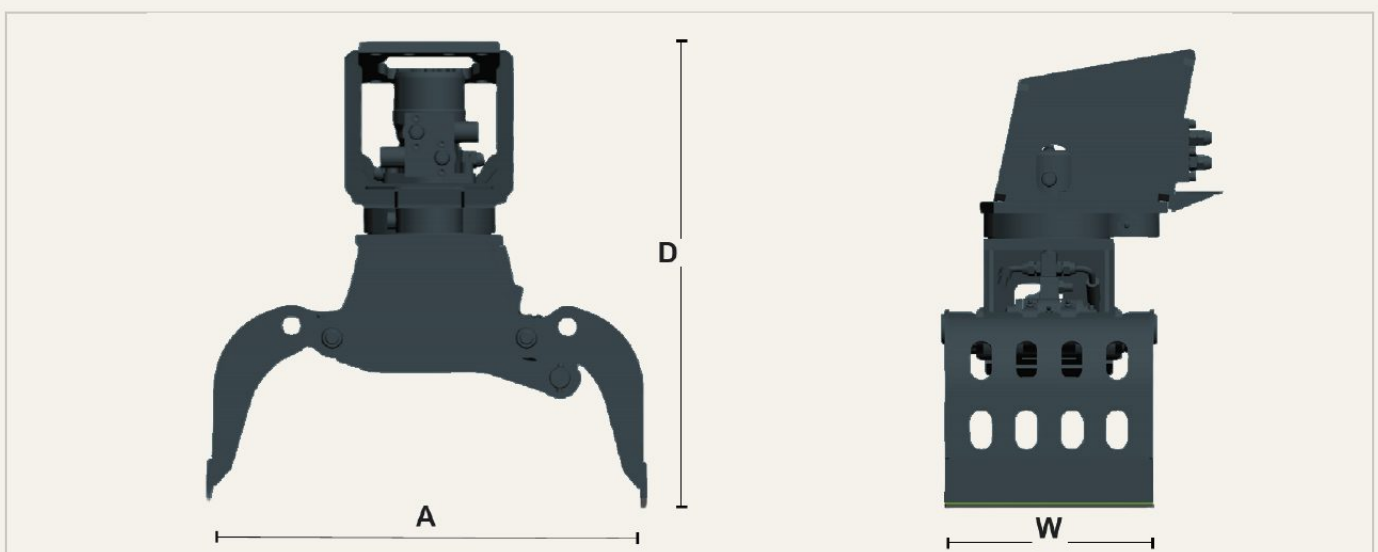


Fig. 02 · Dimension reference (not to scale): D · A · W

D 740 mm · A 770 mm · W 350 mm

MHA CONSTRUCTION EQUIPMENT

info@mhaconstructionequipment.com · www.mhaconstructionequipment.com

Data based on MHA Sorting Grapple EN, ED. 2026 V1.0. Specifications are subject to change without notice.

OPEN-S MEMBER

