

SORTING GRAPPLE

MG
1150

PRODUCT DATASHEET

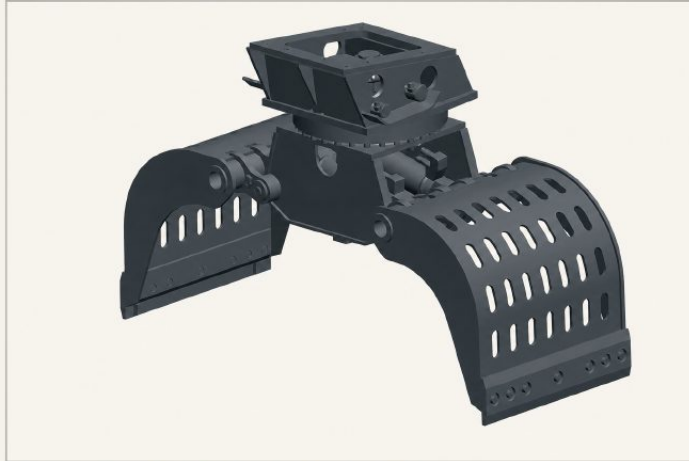


FIG. 01 · MG-1150 · EXTERIOR VIEW · RAL 7026

Mid-duty · 15–20 t carriers: wider jaws, larger shells and higher closing force for general demolition and bulk handling.

01

Higher closing force

46 kN closing force for mixed-material handling.

02

Wider opening

1,950 mm maximum opening improves productivity per cycle.

03

Reinforced structure

Reinforced body for continuous medium- to heavy-duty work.

Technical specifications PRODUCT DATA

Carrier weight	15–20 t	Closing force	46 kN
Weight	1,150 kg	Open/close pressure	350 bar
W Shell width	1,000 mm	Open/close oil flow	170 L/min
A Maximum opening	1,950 mm	Cylinders	2
Shell volume	700 L	Rotation motors	1
D Closed height	1,550 mm	Safety valve	OPTIONAL

CONNECTION OPTIONS

- DIRECT PIN-ON
- MS
- CW
- SQ / OPEN-S

SHELL OPTIONS

Alternative shell configurations available on request.



OPTION 1 · Grid



OPTION 2 · Closed



OPTION 3 · Toothed

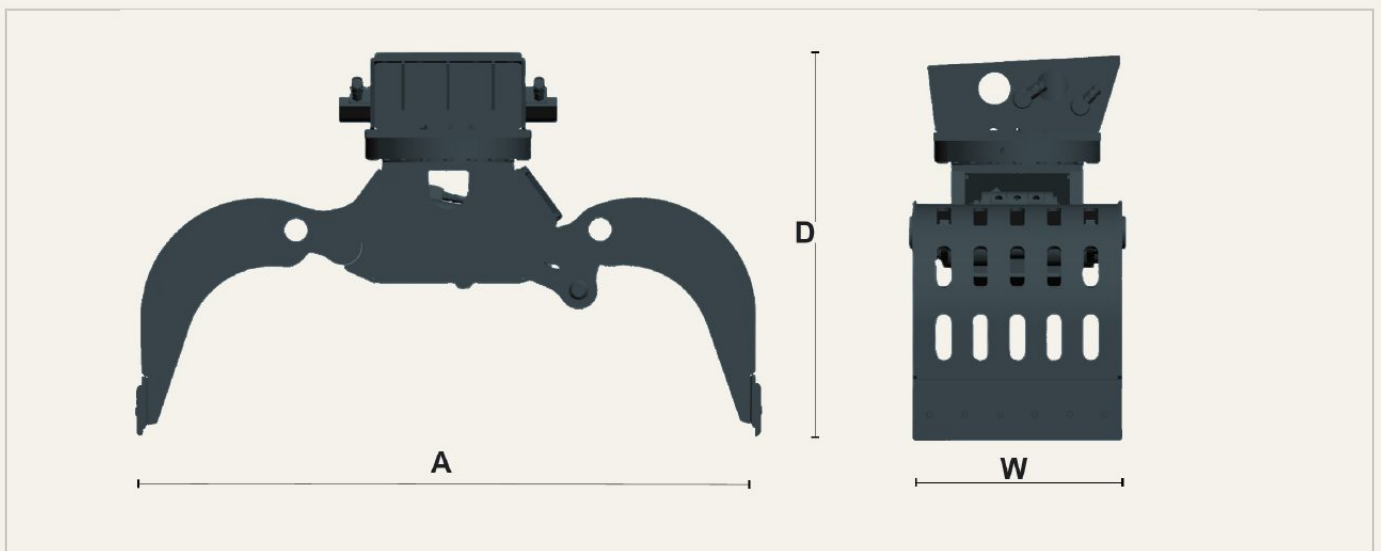


Fig. 02 · Dimension reference (not to scale): D · A · W

D 1,550 mm · A 1,950 mm · W 1,000 mm

MHA CONSTRUCTION EQUIPMENT

info@mhaconstructionequipment.com · www.mhaconstructionequipment.com

Data based on MHA Sorting Grapple EN, ED. 2026 V1.0. Specifications are subject to change without notice.

OPEN-S MEMBER

