

## SORTING GRAPPLE

MG  
75

PRODUCT DATASHEET

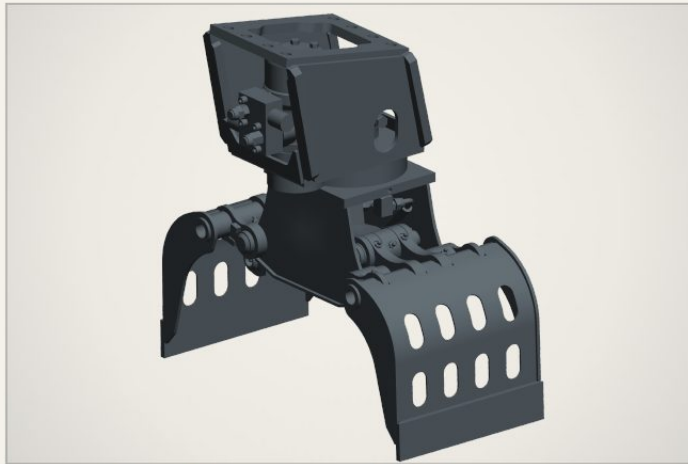


FIG. 01 · MG-75 · EXTERIOR VIEW · RAL 7026

Mini · 0.7–1.2 t carriers: a compact, lightweight sorting grapple with low oil-flow demand for skid-steers and mini excavators.

## 01

**Compact and lightweight**

Low-profile body optimized for the smallest carrier machines.

## 02

**Precise handling**

Well suited to confined spaces and indoor sorting work.

## 03

**Low oil-flow demand**

Recommended oil flow: 15 L/min for easy matching with compact carriers.

## Technical specifications

PRODUCT DATA

|                   |           |                     |          |
|-------------------|-----------|---------------------|----------|
| Carrier weight    | 0.7–1.2 t | Closing force       | 6 kN     |
| Weight            | 85 kg     | Open/close pressure | 220 bar  |
| W Shell width     | 300 mm    | Open/close oil flow | 15 L/min |
| A Maximum opening | 600 mm    | Cylinders           | 1        |
| Shell volume      | 30 L      | Rotation motors     | 1        |
| D Closed height   | 680 mm    |                     |          |

### CONNECTION OPTIONS

- DIRECT PIN-ON
- CW
- MS
- SQ / OPEN-S

### SHELL OPTIONS

Alternative shell configurations available on request.



OPTION 1 · Grid



OPTION 2 · Closed



OPTION 3 · Toothed

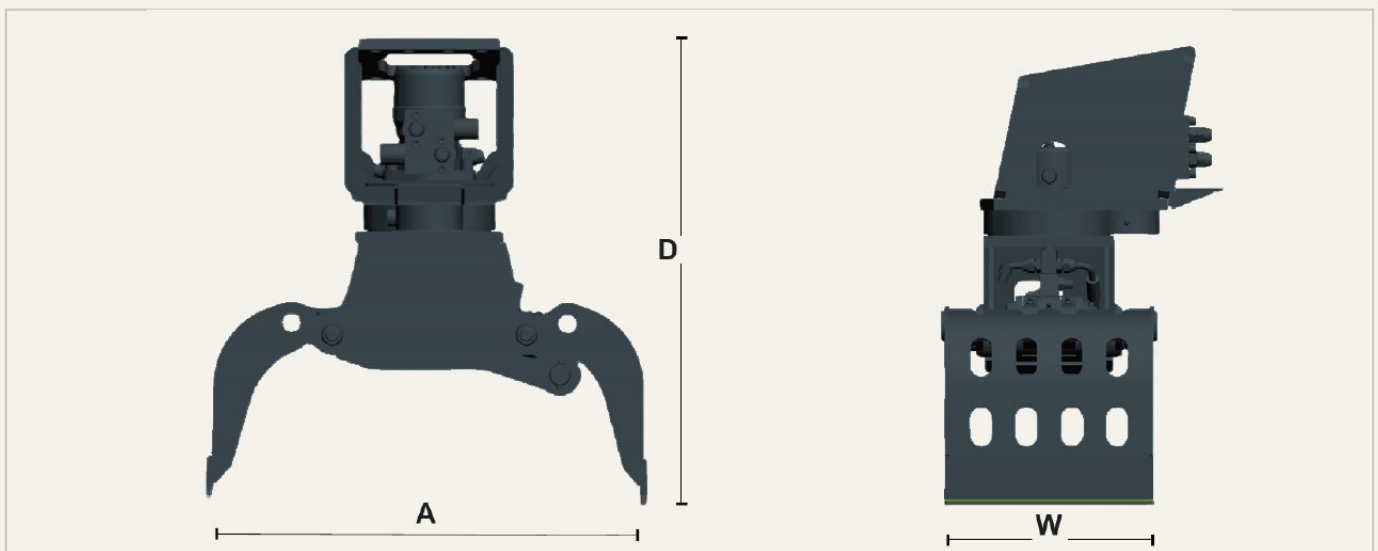


Fig. 02 · Dimension reference (not to scale): D · A · W

D 680 mm · A 600 mm · W 300 mm

## MHA CONSTRUCTION EQUIPMENT

info@mhaconstructionequipment.com · www.mhaconstructionequipment.com

Data based on MHA Sorting Grapple EN, ED. 2026 V1.0. Specifications are subject to change without notice.

OPEN-S MEMBER

